

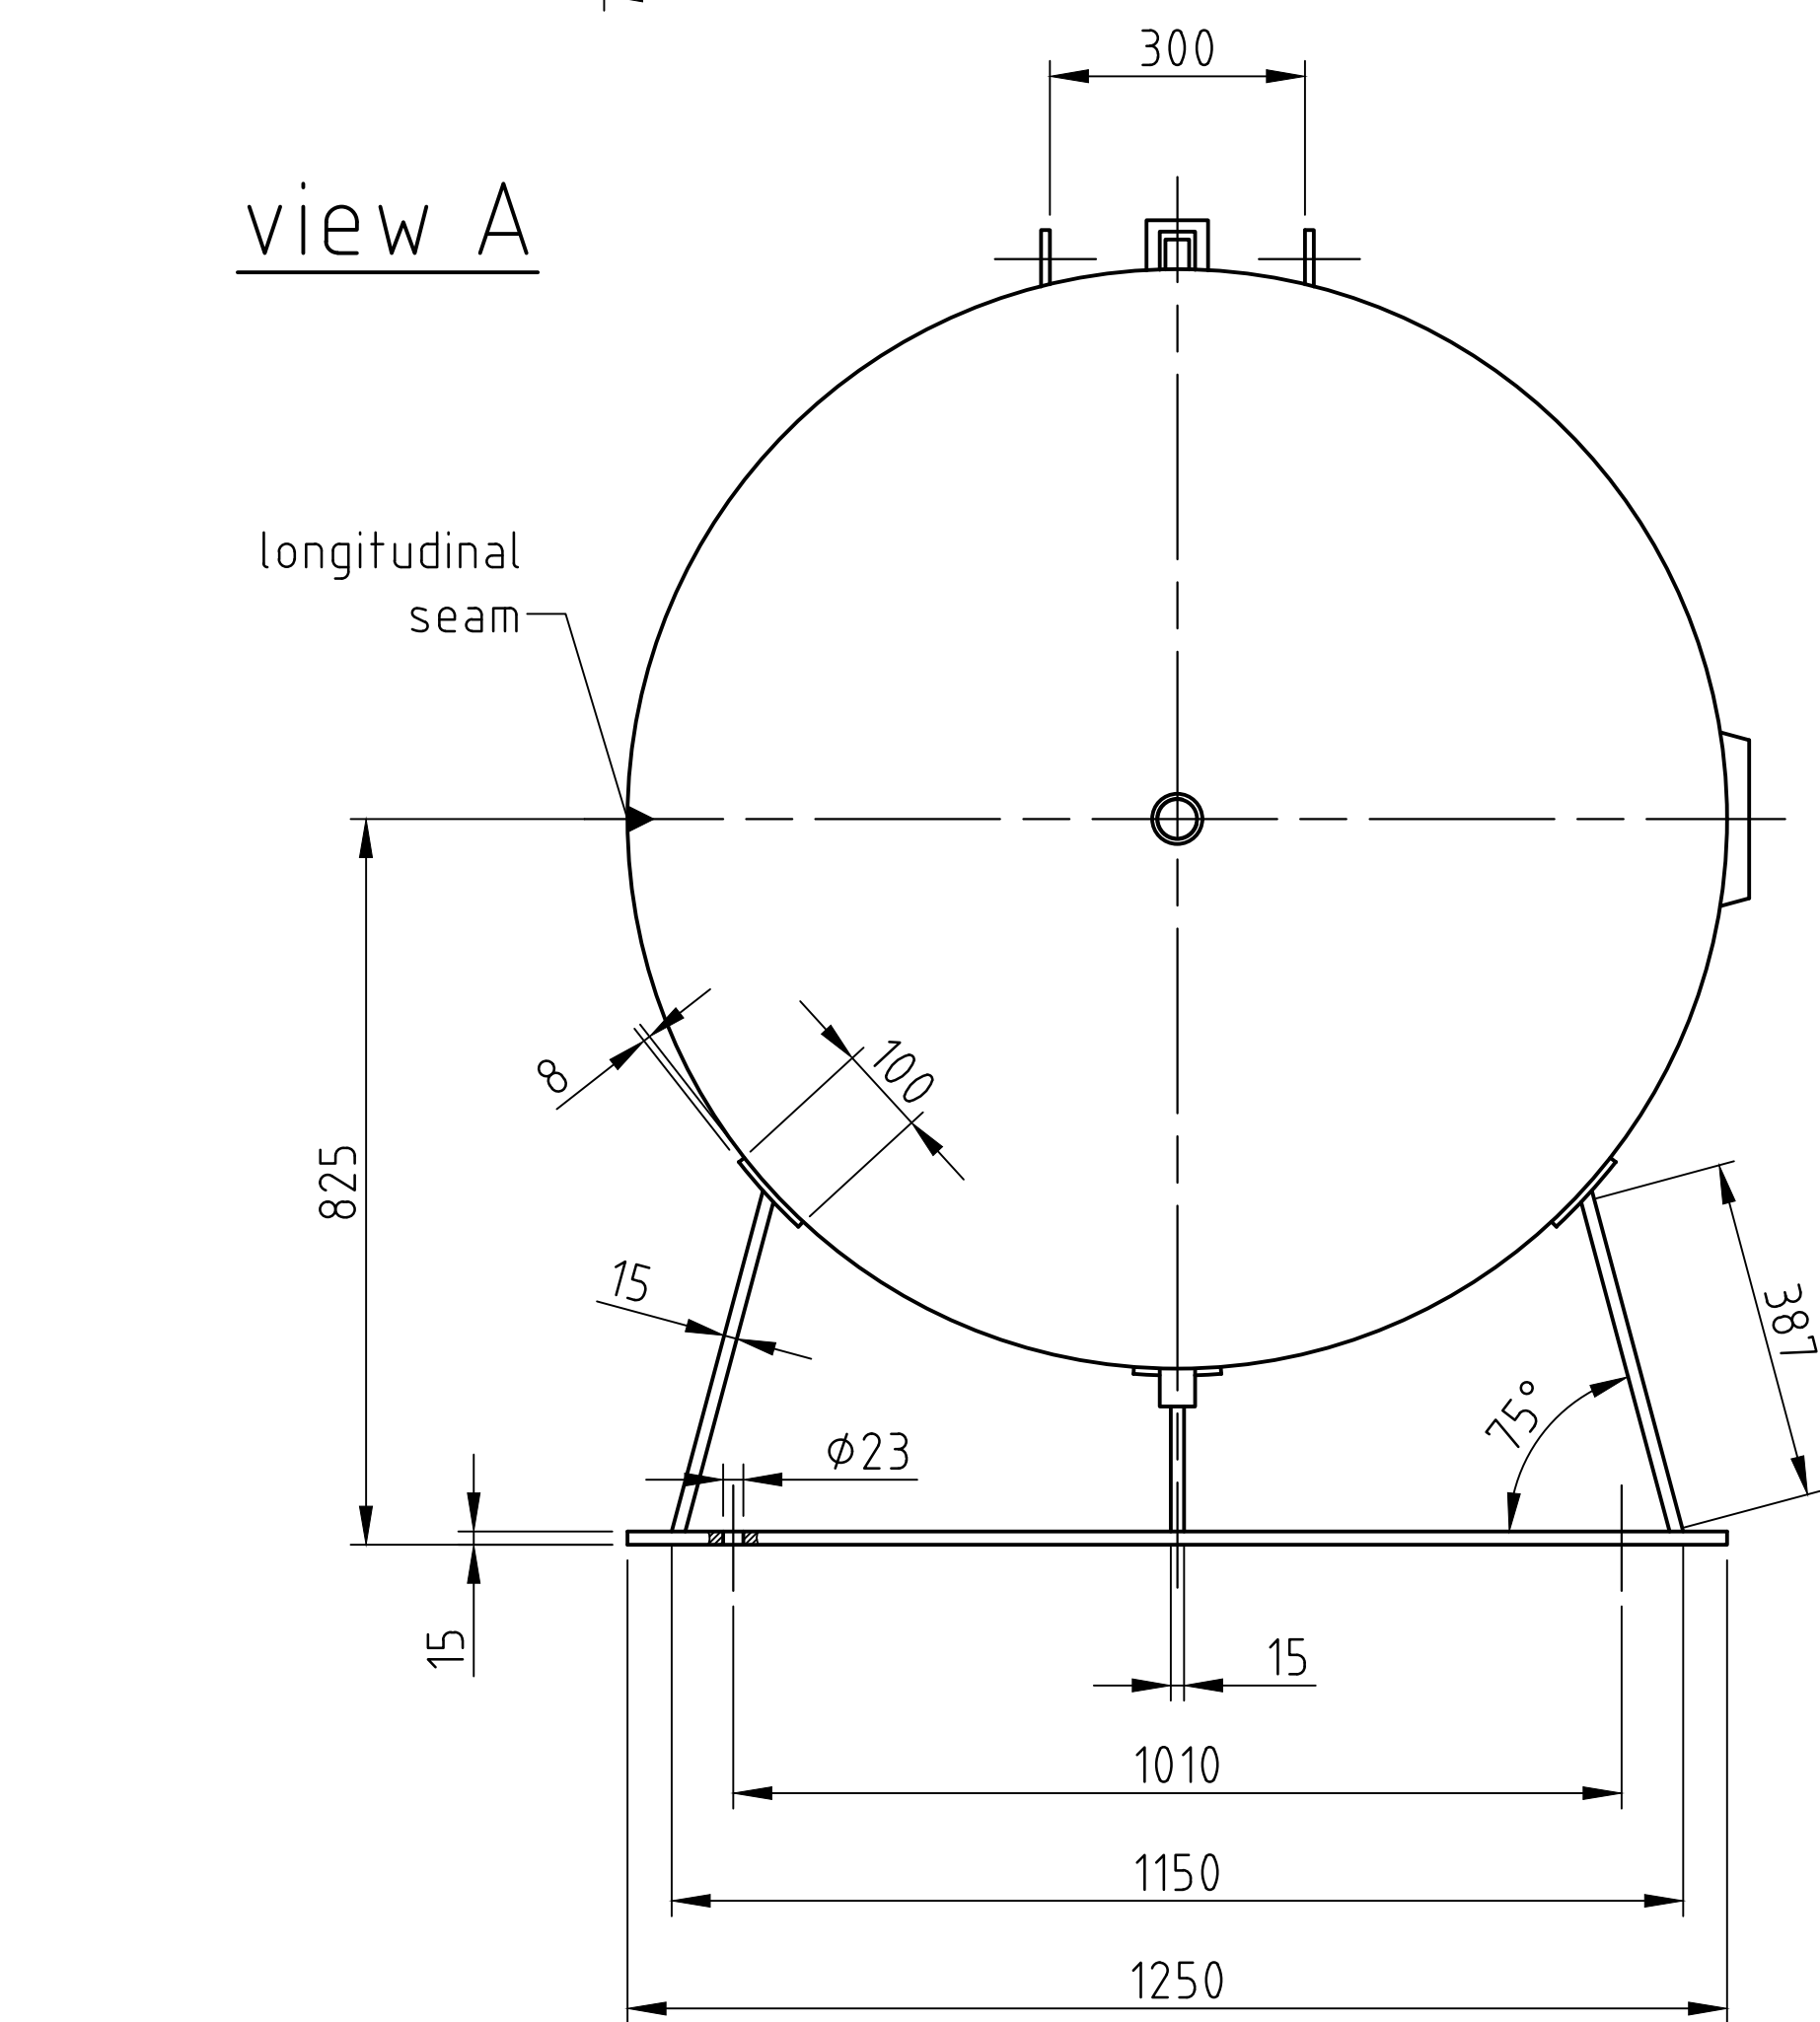
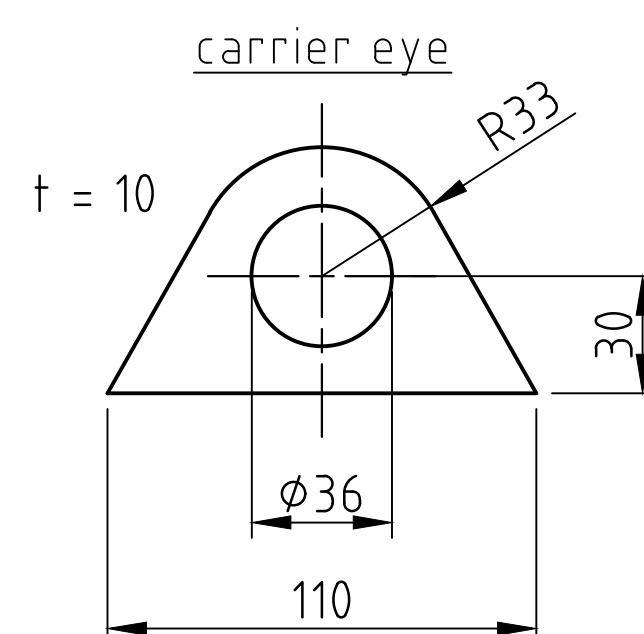


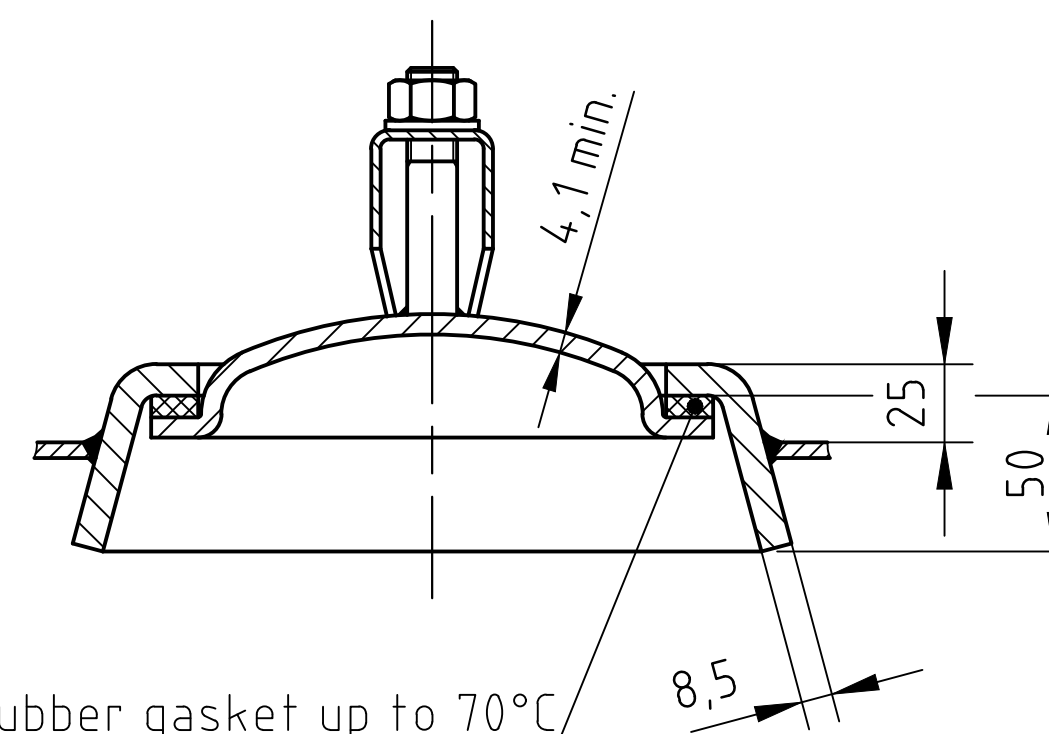

socket welding
drain and plug socket
inside flush

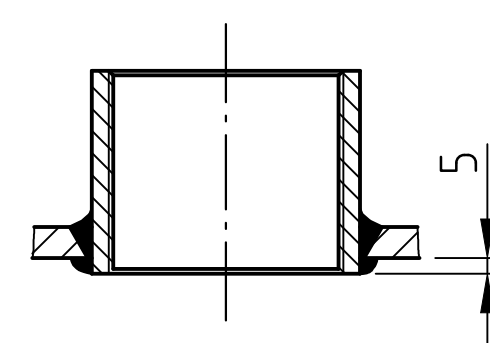

pressure variation :	
pressure swing 0-11 bar max. operations 1.000	
infinite operation of pressure swing within 20% of 11 bar	
operational characteristics / calculation characteristics :	
volume V (litre)	: 3000
max. working pressure PS (bar)	: 11
test pressure PT (bar)	: 15,73
min. working temp. TS (°C)	: -20
max. working temp TS (°C)	: 50
fluid	: compressed air / nitrogen (fluid group 2)
location	: inside and outside building possible

coating :	
inside :	raw
outside :	primed (if costumer wishes lacquered)

manufacturing and testing
acc. to PED 2014 / 68 / EU - AD 2000

conformity benchmark :

fluid group	: 2	categorie	: IV
diagram	: 2	module	: H1

scale:	1:17.5		description: pressure vessel horizontal 3000 l 11 bar	drawing no.: MB 020102-1.3000G/E	revision: A
our no.:	-				
order no.:	-				
used for:	M+B Standardvessel				
weight:	ca.630 kg				
sheet:	1	date	name	drawing no. of design inspection: MB 020102-1	date of revision: 23.06.2015
of sheet:	1				
date of plot:	23.06.2015				
file:	ENG-010791				
		compl.	23.06.2015	CW	
		appr.	23.06.2015	SW	
		follow protection mark acc. DIN 34			